

DC Series DC7AH-12V

VRLA - Deep Cycle Battery

Specification

Nominal Voltage	12V	
Nominal Capacity(20HR)	7.0AH	
Dimension	Length	151±1mm (5.95 inches)
	Width	65±1mm (2.56 inches)
	Container Height	94.5±1mm (3.72 inches)
	Total Height (with Terminal)	100±1mm (3.94 inches)
Approx Weight	Approx 2.15 kg (4.70lbs)	
Terminal	T1 / T2	
Container Material	ABS	
Rated Capacity	7.00 AH/0.350A	(20hr, 1.80V/cell, 25°C/77°F)
	6.51 AH/0.651A	(10hr, 1.80V/cell, 25°C/77°F)
	5.95 AH/1.19A	(5hr, 1.75V/cell, 25°C/77°F)
	5.37 AH/1.79A	(3hr, 1.75V/cell, 25°C/77°F)
	4.40 AH/4.40A	(1hr, 1.60V/cell, 25°C/77°F)
Max. Discharge Current	105A (5s)	
Internal Resistance	Approx 23mΩ	
Operating Temp. Range	Discharge	-15~50°C (5~122°F)
	Charge	0~40°C (32~104°F)
	Storage	-15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 2.1A. Voltage	
	14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
Standby Use	No limit on Initial Charging Current Voltage	
	13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	CERTO DC series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	

Applications

- ◆ All purpose
- ◆ Uninterruptable Power Supply (UPS)
- ◆ Electric Power System (EPS)
- ◆ Emergency backup power supply
- ◆ Emergency light
- ◆ Railway signal
- ◆ Aircraft signal
- ◆ Alarm and security system Electronic apparatus and equipment
- ◆ Communication power supply
- ◆ DC power supply

ISO 9001	ISO 14001	OHSAS 18001	TLC
CE	RoHS	 	

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	13.9	10.7	8.9	7.69	5.95	4.39	3.69	2.18	1.71	1.39	1.14	0.98	0.793	0.663	0.365
1.80V/cell	18.8	13.7	10.7	9.10	7.02	5.10	4.14	2.38	1.83	1.48	1.22	1.06	0.842	0.684	0.368
1.75V/cell	21.2	15.1	11.7	9.78	7.28	5.29	4.33	2.48	1.88	1.53	1.25	1.07	0.856	0.703	0.372
1.70V/cell	23.3	16.5	12.5	10.3	7.59	5.50	4.47	2.54	1.92	1.55	1.28	1.08	0.868	0.716	0.378
1.65V/cell	25.7	17.7	13.3	10.9	8.01	5.64	4.57	2.57	2.01	1.62	1.31	1.13	0.882	0.731	0.383
1.60V/cell	28.4	19.3	14.3	11.65	8.45	5.88	4.62	2.69	2.07	1.66	1.36	1.15	0.891	0.739	0.385

Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	25.6	19.8	16.6	14.5	11.3	8.19	7.13	4.24	3.34	2.72	2.23	1.93	1.567	1.313	0.721
1.80V/cell	34.0	25.1	19.8	16.9	13.2	9.72	7.95	4.60	3.57	2.89	2.37	2.07	1.657	1.351	0.727
1.75V/cell	37.5	27.1	21.3	18.1	13.5	9.99	8.27	4.76	3.63	2.94	2.43	2.12	1.682	1.385	0.733
1.70V/cell	40.1	28.9	22.5	18.8	14.1	10.35	8.51	4.86	3.72	3.01	2.49	2.15	1.703	1.412	0.746
1.65V/cell	43.7	30.9	23.7	19.9	14.7	10.50	8.64	4.90	3.85	3.11	2.55	2.19	1.726	1.439	0.755
1.60V/cell	47.1	32.8	24.5	20.9	18.4	10.92	8.67	5.09	3.95	3.19	2.63	2.24	1.739	1.452	0.758


Note The above data are average values, and can be obtained with 3 charge/discharge cycles. These are not minimum values.

DC Series DC7AH-12V VRLA - Deep Cycle Battery


Dimensions

T1 Terminal


Unit: mm [inches]

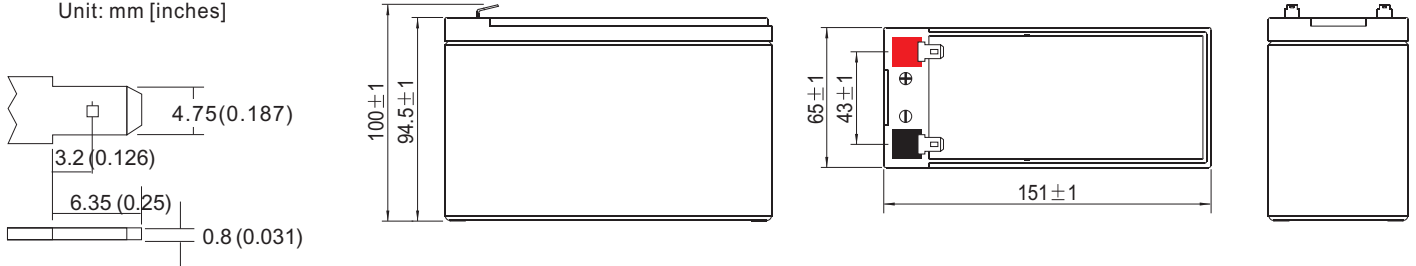


Float Charging Characteristics

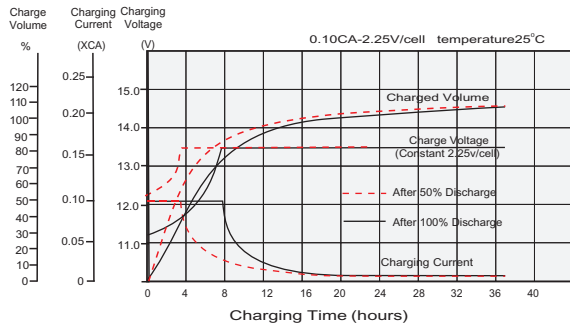


Discharge Characteristics

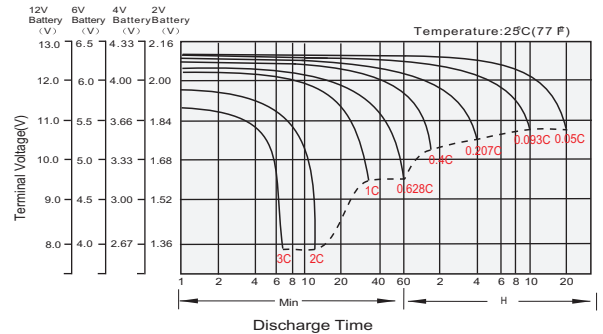


Temperature Effects in Relation to Battery Capacity

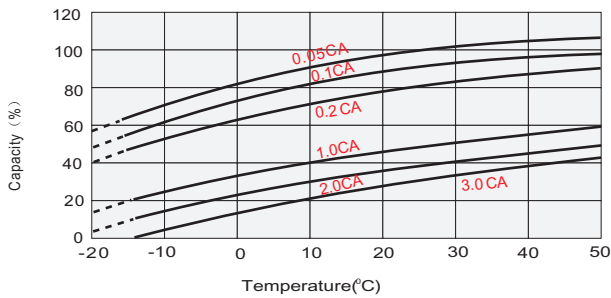


Effect of Temperature on Long Term Float Life

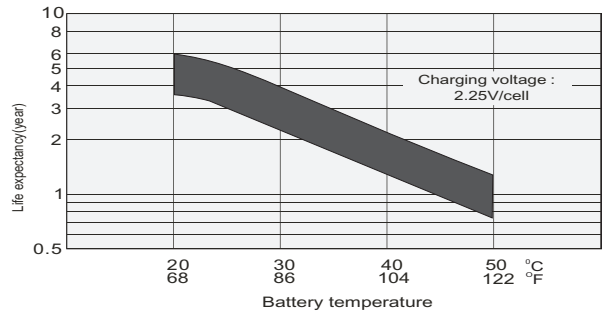

Cycle Life in Relation to Depth of Discharge

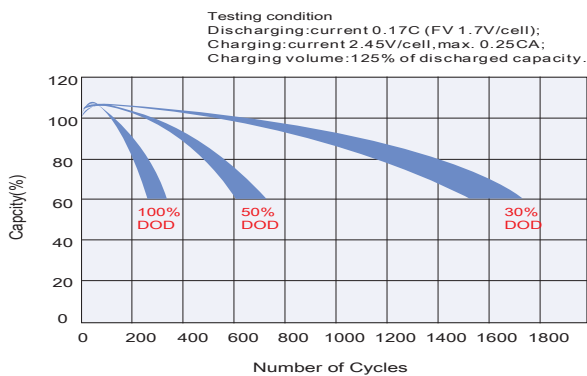

Self Discharge Characteristics

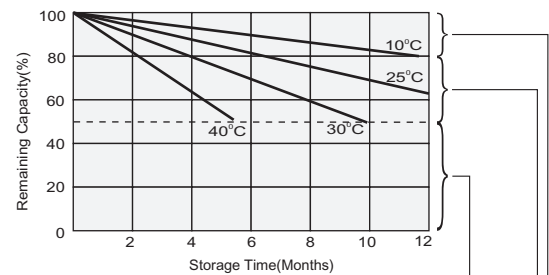

Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this is reached.

Supplementary charge required before use. Optional charging way as below:
1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
3. Charged for 8-10 hours at limited current 0.05CA.

No supplementary charge required
(Carry out supplementary charge before use if 100% capacity is required.)

CERTO BATTERIES

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specification are subject to modification without notice.